


DYNAMOOV

Base panel mounting and pull-out shelf

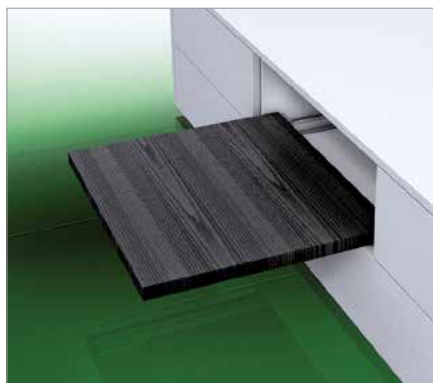

Dynamoov for base panel mounting:

- Full extension drawer synchronised, 30 kg load capacity
- Soft-close damping system
- Assembly on cabinet base or additional base panel
- Particularly suitable for pull-out shelves (no screw-on bracket at side)


Shelf holder set for shelves:

- Height adjustment +3.5 mm
- Optional depth adjustment +3.5 mm
- Stepless shelf self-locking
- Compatible with all Dynamoov slides

Packaging unit (PU):

- 210 = 15 units in cardboard box
- 211 = 20 units in cardboard box
- 233 = 200 units in a cardboard box
- 517 = 50 units in PE in a cardboard box
- 533 = 200 units in PE in a cardboard box


ORDER INFORMATION


1 Dynamoov full extension slide Soft-close for base panel mounting Set: One left, one right						
						
NL*	30 kg					
	Art.-no.	PU				
400	F130 107917	211				
450	F130 107920	210				
500	F130 107923	210				
550	F130 107929	210				

* upon request

2 Dynamoov 1D set Front locking device (1D) and shelf holder, one of each left/right						
						
	Art.-no.	PU				
	F134 107411	517				

Individual components			
			
Description	Art.-no.	PU	
Front locking device (1D) Set: One left, one right	F134 101220	517	233
Shelf holder Set: One left, one right	F134 101305	533	

Optional: Depth adjustment (1D) Set: One left, one right			
			
	Art.-no.	PU	
	F134 101313	533	

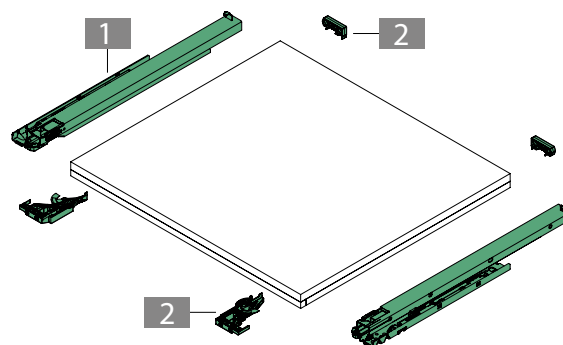

PAGE REFERENCES

Dynamoov Soft-close	50	Dynamoov Tipmatic	54	Assembly aids	60
Dynamoov Self-close	52	Technical information	58	Packaging code	75

INSTALLATION INFORMATION

All dimensions in millimetres

Installation dimensions $LWB = (LWK - 42)^{+0}_{-1.5}$ max. 16 min. LWB = 145 mm min. 16 max. 13 min. 10 27.5 21 LWK 16	Pull-out shelf $TBL = NL - 20 + X$ X (max. 16) 5 30+X $MET = NL + 8 + X$
Locking device fixing position 10 13 HV + 3.5 mm 72.5 X (max. 16) 7.5 19 23 55 min.	Installation dimensions, back of shelf 32 4 8
Fixing positions on base panel KV 30+X 8+X 16 400 - 500 550 352 332 284 264 20 22 $MET = NL + 8 + X$ 40 kg Chipboard screw Ø 4 x 16 mm Screw head Ø 7 mm	

LEGEND

HV Height adjustment
 LWK Inside cabinet width
 LWB Clear shelf width
 MET Minimum installation depth

NL Nominal length
 TBL Shelf length